PROTECTOR™ SERIES Flush Floor Box Flush, Stainless Steel
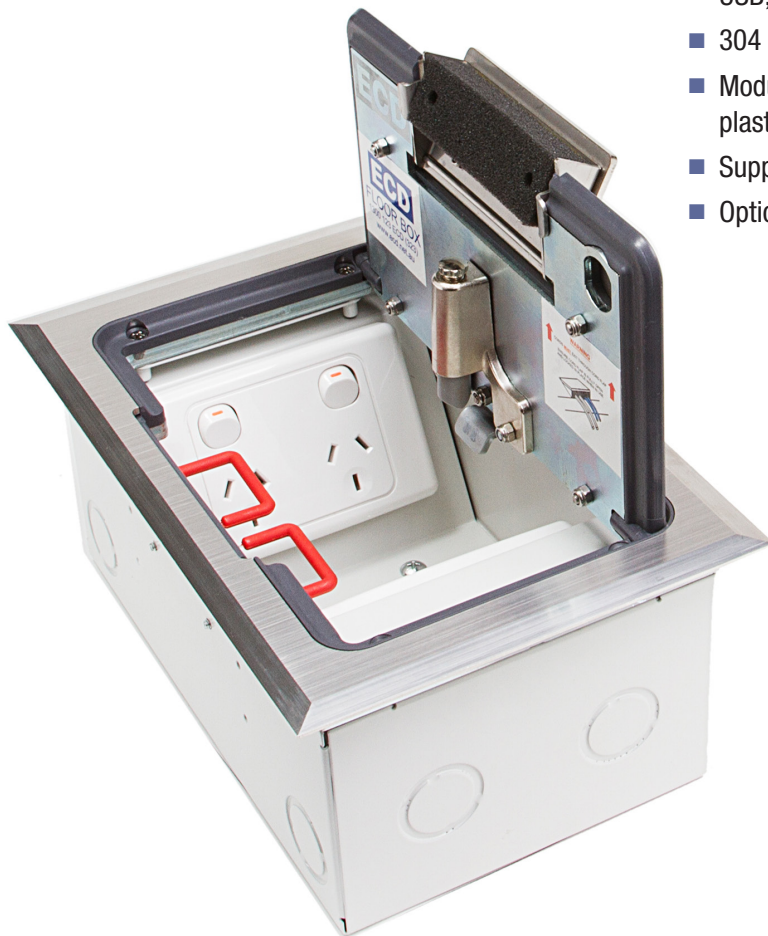
AT A GLANCE…

- Capacity: 2 standard sized plates
- Box Size: 240 x 150 x 110 mm Deep
- Features: • **Cable Shield**® Frame
                   • Soft close lid
- Lid Material: Stainless 304 – No. 4 Linished
- Suitable for: Cat6A & 7A Cabling

"Easy as ECD®"

- Flush Protector™ Series Stainless Steel Lid and Frame with No. 4 Linished finish.
- Protector™ Series features
  - **Cable Shield**® Frame assembly to prevent cables being cut. (Patent Certified 2017100897 & Patent Pending 2015204344)
  - Soft close lid to stop lid from slamming shut
  - Cable retainer for easy cable management.
- Robust and large capacity cable exit flap with retracing lifting handle.
- Capacity for 2 standard outlet plates. (1 x double power & 1 x Data and/or A.V.)
- Suitable for category 6A and 7A data cabling with generous bend radius capacity.
- Suitable for Audio / Video outlets including VGA, HDMI, USB, etc.
- 304 Grade Solid Stainless Steel.
- Modular box body and lid design, interchangeable with plastic and other lids in the ECD® floor box range.
- Supplied with temporary construction lid.
- Option to fit cam lock if required.

ECD®

ESTABLISHED 1979

Electric Cable Duct Systems P/L
Phone: 1300 123 ECD (323)   Fax: 1300 372 825
Email: info@ecd.net.au   website: www.ecd.net.au

ABN 80005544105

JUNE2018

ASSEMBLY DIAGRAM

PROTECTOR™ SERIES FLUSH FLOOR BOX – FLUSH STAINLESS STEEL – FB2SF

FB2SF STAINLESS STEEL FLUSH LID AND FRAME ASSEMBLY WITH *CABLE SHIELD®* FRAME, SOFT CLOSER, CABLE EXIT, RUBBER DUST SEAL AND RECESSED LIFTING HANDLE (OVERALL LID SIZE 266 x 176)

CABLE SHIELD® FRAME ASSEMBLY

OUTLET MOUNTING BRACKET TO SUIT 1 No. DOUBLE GPOs

OUTLET MOUNTING BRACKET TO SUIT 1 No. STANDARD DATA GRID PLATE

DATA PLATE VIEW

STEEL BOX BODY
(240 x 150 x 110mm DEEP)
12 No. 25ø/32ø COMBINATION CONDUIT KNOCKOUTS

OPTIONAL TIMBER FLOOR FIXING BRACKETS
PART No. FBTFB

NOMINAL RECESS SIZE
250 x 160 x 120 DEEP FOR TIMBER FLOOR OR 300 x 200 x 120 FOAM BLOCKOUT FOR CONCRETE

SECTION THRU' BOX

POWER | DATA
110
240
60

CONDUIT LOCATION BOX BASE

240
25 | 190 | 25
150
40 | 70 | 40

CONDUIT LOCATION HINGE & EXIT SIDES

240
25 | 190 | 25
15
95
70
TEMPORARY LID
25

CONDUIT LOCATION OUTLET SIDES

150
40 | 70 | 40
15
95
52
43